

## Chapter 1

# Boussinesq Models and Applications to Nearshore Wave Propagation, Surf Zone Processes and Wave-Induced Currents

James T. Kirby

Center for Applied Coastal Research, University of Delaware, Newark, DE 19716, USA

## 1. INTRODUCTION

Classical Boussinesq theory provides a set of evolution equations for surface water waves in the combined limit of weak nonlinearity (characterized by  $\delta \ll 1$ ) and weak dispersion ( $\mu \ll 1$ ) with the ratio  $\delta/\mu^2 = O(1)$ . The parameters represent a wave height to water depth ratio, and a water depth to wavelength ratio, respectively. In an early review of the state of modeling efforts directed at predicting wave-induced nearshore circulation, Basco (1983, p. 352–353) concluded that

“The Boussinesq theory offers the possibility to eventually raise the fundamental knowledge of coastal hydrodynamics to a higher level. No time-averaging is involved. Nonlinear wave propagation and resulting wave height variations are automatically produced as part of the calculation procedure. The unsteady asymmetrical currents and instantaneous water surface variations as solutions to the governing equations are only obtainable with the aid of large, high-speed computers. Solution techniques and applications are in their infancy. Wave breaking and surf zone simulations have yet to be implemented.”

At the time of this prediction, Boussinesq models were scarce, difficult and time consuming to run, and relatively undeveloped for practical physical applications. Very few explicit calculations of coastal wave propagation, and none of surf zone processes, had been made using models based on the Boussinesq theory, and the long-term averaging of model results needed to obtain predictions of mean currents had not been performed. The conclusion that the Boussinesq model approach could provide an advantage over the more well-established procedure of using a radiation stress field to drive a slowly varying mean current field (for a recent example see Özkan-Haller and Kirby, 1999) was met by occasional skepticism, as evidenced for example by the discussion of Basco’s paper by Kirby and Dalrymple (1984).

In the years from 1983 to the present, events have firmly indicated that Basco was correct in his original assessment. Modeling schemes based on Boussinesq equations coupled with innovative extensions to the theoretical framework have been shown to be accurate and revealing predictors of a wide range of nearshore hydrodynamic behavior, including wave propagation and shoaling, wave current interaction, wave breaking and the generation of nearshore circulation, wave-structure interaction and a range of additional topics. The availability of faster computers is bringing the modeling technique into the realm of practical calculations, and model codes have been documented and are, in some cases (for example, Kirby et al., 1998) freely available to the public.

This chapter provides an overview of several aspects of the recent development of the Boussinesq modeling technique, aimed especially at providing a description or predictive capability in the nearshore ocean. The review highlights the work of this author and collaborating colleagues at the University of Delaware over the past decade, and is thus in some sense somewhat narrow in its orientation. Attempts have been made to provide balanced indications of the work of other groups in the field, but for omissions apologies are offered.

The chapter proceeds by providing an overview of the development of modern fully nonlinear Boussinesq theory in Section 2, and provides several examples illustrating wave shoaling and propagation properties as well as a test of the generation and advection of a vertical-core vortex structure. Section 3 turns to practical extensions to the  $O(\mu^2)$  theory, which provides the foundation of most operational Boussinesq models at this time. Extensions to curvilinear coordinates and the inclusion of wave breaking, bottom friction and subgrid-scale mixing are described and illustrated. Section 4 discusses the problem of nearshore circulation, and describes example calculations addressing the generation of longshore currents, longshore current instability and formation of shear waves, and the generation and destabilization of rip currents. Section 5 discusses recent results including vertical shear effects (or the presence of horizontal vorticity). Miscellaneous topics are discussed in Section 6, including the use of Boussinesq models to assist in the depth inversion problem, and an application to tsunami propagation and inundation.

## 2. BOUSSINESQ EQUATIONS FOR WAVE PROPAGATION

The onset of recent developments in the field of Boussinesq models was triggered by two events. The first was the increasing availability of the computer resources needed to run the models. The second was the development of variants of the theory which could be optimized to obtain better dispersion properties at larger  $kh$  values, thus allowing the model to treat a larger range of water depths. Critical steps in this process were provided by Madsen et al. (1991), who established a procedure for optimizing model performance through rearrangement of dispersive terms, and Nwogu (1993), who demonstrated the flexibility obtained by using the horizontal velocity at a given elevation in the water column as a dependent variable. Both procedures have been extensively utilized in the development of subsequent theory. The review articles of Kirby (1997) and Madsen and Schäffer (1999) and the book by Dingemans (1997) provide extensive reviews of these developments up to 1999, and therefore the material here is concentrated on more recent developments. In addition, the subjects of wave interaction with permeable structures, surf and swash zone sediment transport, and frequency domain modeling are covered elsewhere in this book and are thus largely neglected here.

### 2.1. Hydrodynamic Fundamentals

Almost all Boussinesq-type models are derived from the framework of incompressible, inviscid flow. (The exception will be the case of waves with horizontal vorticity or vertical shear, considered in Section 5) To proceed, a scaling which is appropriate to the regime where wavelength exceeds water depth is chosen.

$$(x, y) = (k_0 x', k_0 y'); z = z' / h_0; t = \sqrt{gh_0 k_0^2} t'; \eta = \eta' / a_0; \phi = \left( \frac{a_0 \sqrt{gh_0}}{k_0 h_0} \right)^{-1} \phi' \quad (1)$$

where primes denote dimensional variables, and where  $h_0$  is a depth scale,  $a_0$  is a wave amplitude scale, and  $k_0$  is an inverse horizontal length scale. The dependent variables are surface displacement  $\eta$  and velocity potential  $\phi$ . Velocity components are then given by

$$\mathbf{u} = (u, v) = \nabla \phi \quad (2)$$

for horizontal velocities, where  $\nabla = (\partial/\partial x, \partial/\partial y)$ , and

$$w = \phi_z \quad (3)$$

for vertical velocity, where subscripts  $x$ ,  $y$ ,  $z$  or  $t$  will denote partial derivatives. The resulting scaled problem is characterized by the dimensionless ratios

$$\mu = k_0 h_0; \quad \delta = a_0 / h_0 \quad (4)$$

The parameter  $\mu$  characterizes frequency dispersion, and the limit  $\mu \rightarrow 0$  represents the non-dispersive limit. The designation *weakly dispersive* refers to the regime  $\mu \ll 1$ . The parameter  $\delta$  characterizes nonlinearity, and the limit  $\delta \rightarrow 0$  represents the linear limit. The designation *weakly nonlinear* refers to the regime  $\delta \ll 1$ . In the present context, we will use the terminology *fully nonlinear* to indicate that no truncation based on powers of  $\delta$  is employed in obtaining the corresponding model equations. The resulting set of scaled equations is given by

$$\nabla^2 \phi + \frac{1}{\mu^2} \phi_{zz} = 0, \quad -h \leq z \leq \delta \eta \quad (5)$$

$$\nabla h \cdot \nabla \phi + \frac{1}{\mu^2} \phi_z = 0, \quad z = -h \quad (6)$$

$$\eta + \phi_t + \frac{\delta}{2} \left( |\nabla \phi|^2 + \frac{1}{\mu^2} (\phi_z)^2 \right) = 0, \quad z = \delta \eta \quad (7)$$

$$\eta_t + \delta \nabla \eta \cdot \nabla \phi - \frac{1}{\mu^2} \phi_z = 0, \quad z = \delta \eta \quad (8)$$

Equation (8) is often replaced by a depth-integrated form of equation (5) which uses equations (6) and (8) to resolve boundary terms, giving

$$\eta_t + \nabla \cdot \mathbf{M} = 0; \quad \mathbf{M} = \int_{-h}^{\delta \eta} \nabla \phi dz \quad (9)$$

The central feature of Boussinesq wave theories is that the solution to equations (5)–(6) is usually given as a power series in  $z$ , after which the surface boundary conditions are employed to obtain evolution equations. The choice of a reference elevation for the series expansion in  $z$  is initially fairly arbitrary. Following Madsen and Schäffer (1998), an expansion about the still water level of the form

$$\phi(x, y, z, t) = \sum_{n=0}^{\infty} z^n \phi^{(n)}(x, y, t) \quad (10)$$

gives, after substitution in equation (5),

$$\phi(x, y, z, t) = \sum_{n=0}^{\infty} (-1)^n \mu^{2n} \left( \frac{z^{2n}}{(2n)!} \nabla^{2n} \phi^{(0)} + \frac{z^{2n+1}}{(2n+1)!} \nabla^{2n} \phi^{(1)} \right) \quad (11)$$

where  $\phi^{(0)}$  and  $\phi^{(1)}$  represent  $\phi$  and  $\phi_z$  evaluated at  $z = 0$  and are unknown prior to applying boundary conditions. Agnon et al. (1999) demonstrate that equation (11) recovers the full linear solution for a slowly varying plane wave over a mild bottom slope.

The standard procedure for developing Boussinesq models follows from using the bottom boundary condition (equation (6)) to eliminate the  $\phi^{(1)}$  unknown in favor of  $\phi^{(0)}$  (or a suitably defined replacement), after which the development proceeds using a truncated expansion for  $\phi$ . We concentrate on this procedure below. More recently, Agnon et al. (1999) and Madsen et al. (2002) have pursued a path where the identity of horizontal and vertical velocities is maintained through much

of the derivation, adding a dependent variable but increasing flexibility in optimizing results. This procedure will be discussed in Section 2.4.

## 2.2. The Weakly Dispersive Problem

The full linear problem taken from equations (5)–(8) describes propagating water waves with a dispersion relation given by

$$\omega^2 = gk \tanh kh \quad (12)$$

or, equivalently,

$$c^2 = gh \frac{\tanh kh}{kh} \quad (13)$$

where  $\omega$  denotes angular frequency,  $k$  denotes magnitude of a wave number vector  $\mathbf{k}$ , and  $c$  denotes phase speed for a monochromatic wave component. In the limit  $\mu \ll 1$ , the ratio in equation (13) should approach 1, and hence  $c^2 \sim gh$ . The resulting waves are nearly non-dispersive, with a leading order correction of the form

$$c^2 = gh(1 + O(kh)^2) \quad (14)$$

Obviously, an approximation of this form can impose severe restrictions when the problem of propagating water waves in a general domain with a range of water depths is considered. In modern terms, the principal goal of most derivations of Boussinesq models is to obtain an approximation to the ratio in equation (13) which is fairly robust over a range of values of  $kh$ ; i.e., extending outside of the limit  $\mu \rightarrow 0$ .

Following Nwogu (1993), we define a reference elevation  $z_\alpha$  located within the water column, and re-express the series expansion for  $\phi$  in terms of the value at  $z_\alpha$ . Using the bottom boundary condition (equation (6)) and truncating the resulting series after  $O(\mu^2)$  gives

$$\phi(x, y, z, t) = \phi_\alpha(x, y, t) + \mu^2(z_\alpha - z)\nabla \cdot (h\nabla\phi_\alpha) - \frac{1}{2}\mu^2(z_\alpha^2 - z^2)\nabla^2\phi_\alpha + O(\mu^4) \quad (15)$$


Substituting equation (15) in linearized versions of equations (7) and (9) (with  $\delta = 0$ ) and using  $\phi_\alpha \sim \exp i(kx - \omega t)$  gives the dispersion relation

$$\omega^2 = gk^2h \frac{1 - (\alpha + 1/3)(kh)^2}{1 - \alpha(kh)^2} \quad (16)$$

where

$$\alpha = \frac{1}{2} \left( \frac{z_\alpha}{h} \right)^2 + \frac{z_\alpha}{h} \quad (17)$$

The choice of  $\alpha$  fixes the resulting dispersion relation and the corresponding value of  $z_\alpha$ .  $\alpha = -1/3$  reproduces the classical Boussinesq theory based on depth-averaged velocity, while the choice  $\alpha = -2/5$  reproduces the (2, 2) Padé approximant to equation (13). Nwogu further adjusted the second result by choosing  $\alpha$  to minimize a measure of phase speed error over a range of  $kh$  values, and obtained  $\alpha = -0.39$ . A comparison of the true linear dispersion relation (equation (13)) and the approximate form (equation (16)) is shown in Figure 1, and shows that reasonably accurate dispersion can be obtained for a range of  $\mu$  values up to about 3. The next order of approximation is discussed in Section 2.4.

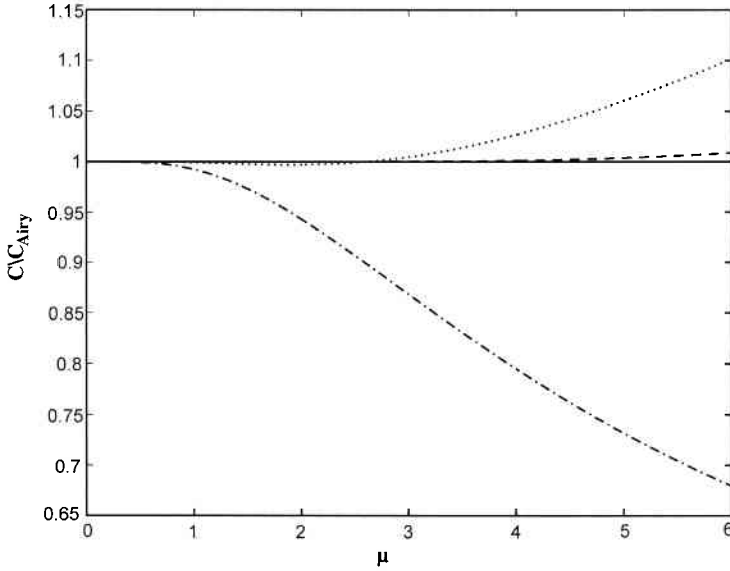

**Figure 1.** Ratio of model linear phase speed  $c$  to exact linear phase speed  $c_{Airy}$  given by equation (13). Standard Boussinesq dispersion with  $\alpha = -1/3$  in equation (16) (dash-dot); optimized  $O(\mu^2)$  dispersion based on the (2,2) Padé approximant with minimization of phase speed errors to obtain  $\alpha = -0.39$  in (16), following Nwogu (1993) (dotted);  $O(\mu^4)$  dispersion based on (4,4) Padé approximant in (31) (dash). (From Gobbi et al., 2000).

### 2.3. Weak vs. Full Nonlinearity in the $O(\mu^2)$ Boussinesq Formulation

Subsequent to the initial work on improved linear dispersion, the next topic to receive attention was the problem of relaxing the restriction of weak nonlinearity in the problem formulation. The need for this extension is clear when one realizes that the wave height to water depth ratio essentially is of  $O(1)$  in the surf zone and just seaward of it. The most obvious line of approach staying within the Boussinesq type of formulation is to drop the notion of pursuing an expansion in powers of  $\delta$ , and instead use the weakly dispersive expression for  $\phi$  or horizontal velocity  $\mathbf{u}$  in the form of a power series in  $\mu^2$  to evaluate the complete surface boundary condition. We will subsequently refer to models resulting from this procedure as *fully nonlinear models*, in the sense that all of the available information on velocities is used to evaluate the full boundary conditions. Numerous early examples of this approach appear in the literature and have been reviewed by Dingemans (1997), Kirby (1997) and Madsen and Schäffer (1999). We restrict our attention here to two examples; those of Wei et al. (1995) and Liu (1994). Following the procedure of Nwogu (1993), each study derived a set of model equations for potential flow written initially in terms of  $\phi_\alpha$  and  $\eta$  given by the volume conservation equation (9) and the Bernoulli equation (7). Using expression (15) in equations (9) and (7) gives

$$\mathbf{M} = H \left[ \nabla \phi_\alpha + \mu^2 \left\{ \nabla \left[ z_\alpha \nabla \cdot (h \nabla \phi_\alpha) + \frac{z_\alpha^2}{2} \nabla^2 \phi_\alpha \right] + \frac{(h - \delta \eta)}{2} \nabla (\nabla \cdot (h \nabla \phi_\alpha)) - \frac{(h^2 - h \delta \eta + (\delta \eta)^2)}{6} \nabla^2 \nabla \phi_\alpha \right\} \right] \quad (18)$$

for volume flux (where  $H = h + \delta\eta$  is the total water depth), and

$$\begin{aligned}
& \eta + \phi_{\alpha t} + \frac{\delta}{2} \nabla \phi_{\alpha} \cdot \nabla \phi_{\alpha} + \mu^2 \left[ (z_{\alpha} - \delta\eta) \nabla \cdot (h \nabla \phi_{\alpha t}) + \frac{1}{2} (z_{\alpha}^2 - (\delta\eta)^2) \nabla^2 \phi_{\alpha t} \right] \\
& + \delta\mu^2 \left\{ \nabla \phi_{\alpha} \cdot \left[ \nabla z_{\alpha} \nabla \cdot (h \nabla \phi_{\alpha}) + (z_{\alpha} - \delta\eta) \nabla (\nabla \cdot (h \nabla \phi_{\alpha})) \right] \right\} \\
& + \delta\mu^2 \left\{ \nabla \phi_{\alpha} \cdot \left[ z_{\alpha} \nabla z_{\alpha} \nabla^2 \phi_{\alpha} + \frac{1}{2} (z_{\alpha}^2 - (\delta\eta)^2) \nabla (\nabla^2 \phi_{\alpha}) \right] \right\} \\
& + \delta\mu^2 \left\{ \frac{1}{2} [\nabla \cdot (h \nabla \phi_{\alpha})]^2 + \delta\eta \nabla \cdot (h \nabla \phi_{\alpha}) \nabla^2 \phi_{\alpha} + \frac{1}{2} (\delta\eta)^2 (\nabla^2 \phi_{\alpha})^2 \right\} = 0
\end{aligned} \tag{19}$$

for the Bernoulli equation. These results were found independently by Liu (1994) and Wei et al. (1995).

An alternate model in terms of  $\eta$  and horizontal velocity  $\mathbf{u}_{\alpha}$  at the reference level  $z_{\alpha}$  is preferred for practical use, as it is extendable to include breaking, frictional and mixing effects. Substituting for  $\nabla \phi_{\alpha}$  in equation (18) using

$$\nabla \phi_{\alpha} = \mathbf{u}_{\alpha} - \mu^2 [\nabla z_{\alpha} \nabla \cdot (h \mathbf{u}_{\alpha}) + z_{\alpha} \nabla z_{\alpha} \nabla \cdot \mathbf{u}_{\alpha}] + O(\mu^4) \tag{20}$$

gives

$$\begin{aligned}
\mathbf{M} = H & \left[ \mathbf{u}_{\alpha} + \mu^2 \left\{ \left[ \frac{1}{2} z_{\alpha}^2 - \frac{1}{6} (h^2 - h\delta\eta + (\delta\eta)^2) \right] \nabla (\nabla \cdot \mathbf{u}_{\alpha}) \right. \right. \\
& \left. \left. + \left[ z_{\alpha} + \frac{1}{2} (h - \delta\eta) \right] \nabla (\nabla \cdot (h \mathbf{u}_{\alpha})) \right\} \right] + O(\mu^4)
\end{aligned} \tag{21}$$

for volume flux. Taking the horizontal gradient of equation (19) leads to a horizontal momentum equation which may be written schematically in the form

$$\mathbf{u}_{\alpha t} + \delta(\mathbf{u}_{\alpha} \cdot \nabla) \mathbf{u}_{\alpha} + \nabla \eta + \mu^2 \mathbf{V}_1 + \delta\mu^2 \mathbf{V}_2 = O(\mu^4) \tag{22}$$

In deriving their version of the model equation, Wei et al. (1995) erroneously made the substitution

$$\frac{\delta}{2} \nabla (\mathbf{u}_{\alpha} \cdot \mathbf{u}_{\alpha}) \rightarrow \delta(\mathbf{u}_{\alpha} \cdot \nabla) \mathbf{u}_{\alpha} \tag{23}$$

after using equation (20) in the Bernoulli equation. The substitution (equation (23)) implies the incorporation of a vorticity term  $\boldsymbol{\omega} \times \mathbf{u}_{\alpha}$ , but, as will be shown below, the  $O(\mu^2)$  contribution to  $\boldsymbol{\omega}$  is missed in this substitution, as pointed out by Chen et al. (2000b) and Hsaio et al. (2002). Wei et al. (1995) obtained the dispersive terms

$$\mathbf{V}_1 = \frac{1}{2} z_{\alpha}^2 \nabla (\nabla \cdot \mathbf{u}_{\alpha t}) + z_{\alpha} \nabla (\nabla \cdot (h \mathbf{u}_{\alpha t})) - \nabla \left[ \frac{1}{2} (\delta\eta)^2 \nabla \cdot \mathbf{u}_{\alpha t} + \delta\eta \nabla \cdot (h \mathbf{u}_{\alpha t}) \right] \tag{24}$$

$$\begin{aligned}
\mathbf{V}_2 = \mathbf{V}_2 \mathbf{W} = \nabla & \left[ (z_{\alpha} - \delta\eta) (\mathbf{u}_{\alpha} \cdot \nabla) (\nabla \cdot (h \mathbf{u}_{\alpha})) + \frac{1}{2} (z_{\alpha}^2 - (\delta\eta)^2) (\mathbf{u}_{\alpha} \cdot \nabla) (\nabla \cdot \mathbf{u}_{\alpha}) \right] \\
& + \frac{1}{2} \nabla \left[ (\nabla \cdot (h \mathbf{u}_{\alpha})) + \delta\eta \nabla \cdot \mathbf{u}_{\alpha} \right]^2
\end{aligned} \tag{25}$$

where the  $\mathbf{W}$  subscript in  $\mathbf{V}_2 \mathbf{W}$  denotes the Wei et al. version. In contrast, Liu (1994) (see corrected versions in Lynett et al., 2002) invoked the substitution

$$\frac{\delta}{2} \nabla (\nabla \phi_{\alpha} \cdot \nabla \phi_{\alpha}) = \delta (\nabla \phi_{\alpha} \cdot \nabla) \nabla \phi_{\alpha} \tag{26}$$

within the original gradient of the Bernoulli equation, and obtained the expression  $\mathbf{V}_1$  as in equation (24). After some rearrangement to get a form close to the Wei et al. form  $\mathbf{V}_{2W}$ , which is a pure gradient, Liu's  $\mathbf{V}_2$  may be written as

$$\mathbf{V}_{2L} = \mathbf{V}_{2W} + \mathbf{V}_{2r} \quad (27)$$

where

$$\begin{aligned} \mathbf{V}_{2r} = & (\mathbf{u}_\alpha \cdot \nabla z_\alpha) [z_\alpha \nabla(\nabla \cdot \mathbf{u}_\alpha) + \nabla(\nabla \cdot (h\mathbf{u}_\alpha))] \\ & - \nabla z_\alpha (\mathbf{u}_\alpha \cdot \nabla)(\nabla \cdot (h\mathbf{u}_\alpha)) - z_\alpha \nabla z_\alpha (\mathbf{u}_\alpha \cdot \nabla)(\nabla \cdot \mathbf{u}_\alpha) \end{aligned} \quad (28)$$

The physical interpretation of this extra term was discovered by Chen et al. (2000b). After some manipulation,  $\mathbf{V}_{2r}$  may be written in the compact form

$$\mathbf{V}_{2r} = \boldsymbol{\omega}_1 \times \mathbf{u}_\alpha \quad (29)$$


where  $\boldsymbol{\omega}_1$  denotes the  $O(\mu^2)$  contribution to vertical vorticity, given by

$$\begin{aligned} \boldsymbol{\omega}_1 = & \mathbf{i}_z [z_{\alpha,x} [(\nabla \cdot (h\mathbf{u}_\alpha))_{,y} + z_\alpha (\nabla \cdot \mathbf{u}_\alpha)_{,y}] - z_{\alpha,y} [(\nabla \cdot (h\mathbf{u}_\alpha))_{,x} + z_\alpha (\nabla \cdot \mathbf{u}_\alpha)_{,x}]] \\ = & \nabla z_\alpha \times \nabla [\nabla \cdot (h\mathbf{u}_\alpha) + z_\alpha \nabla \cdot \mathbf{u}_\alpha] \end{aligned} \quad (30)$$


Adding  $\mathbf{V}_{2r}$  to equation (25) corrects the original model of Wei et al. (1995). We will refer to the combined set of terms simply as  $\mathbf{V}_2$  subsequently. Note that the correction term does not appear in weakly-nonlinear formulations, where terms of  $O(\delta\mu^2)$ , and hence all of  $\mathbf{V}_2$ , are neglected. The term also vanishes in water of constant depth, where  $z_\alpha$  is constant.

Wei and Kirby (1995) have described a numerical scheme for equations of this type which has come into fairly wide usage. Time stepping is treated using a fourth-order Adams-Bashforth-Moulton scheme, while spatial differencing is handled using a mixed-order scheme, employing fourth-order accurate centered differences for first derivatives and second-order accurate derivatives for third derivatives. The latter choice is made in order to move leading truncation errors to one order higher than the  $O(\mu^2)$  dispersive terms, while maintaining the tridiagonal structure of spatial derivatives within time-derivative terms. Wei and Kirby (1995) used a non-staggered grid scheme with  $\mathbf{u}_\alpha$  and  $\eta$  defined at the same locations. More recently, Shi et al. (2001a) have used a staggered grid approach which has less apparent sensitivity to treatment of boundary conditions. The staggered grid scheme has become our preferred approach. Methods for generating waves at internal sources have been described by Wei et al. (1999) and Chawla and Kirby (2000). Kirby et al. (1998) document a version of the non-staggered code, known as *FUNWAVE*, which is available at <http://chinacat.coastal.udel.edu/~kirby/programs/funwave>.

Properties of this model for wave propagation problems have been reviewed by Kirby (1997) and Madsen and Schäffer (1999). The ability of the model to provide an accurate representation of the evolution and transport of the vertical vorticity component was tested by Hommel et al. (2000), who compared model results to laboratory data for the case of a vertical vortex core shed during the passage of a solitary wave past a vertical plane wall blocking half the width of a wave flume. These tests were partially motivated by a previous study by Roddier and Ertekin (1999), who had considered the diffraction of a solitary wave at the tip of a breakwater using a potential flow model analogous to the Bernoulli equation formulation (equation (19)). Roddier and Ertekin indicated the formation of a deep depression at the breakwater tip, which they explained to be a ‘‘bathtub vortex’’. However, a consideration of their geometry shows that a vortex core could not be forming at a position attached to the tip of the wall, since the presence of the wall would interrupt the circulation of fluid around the

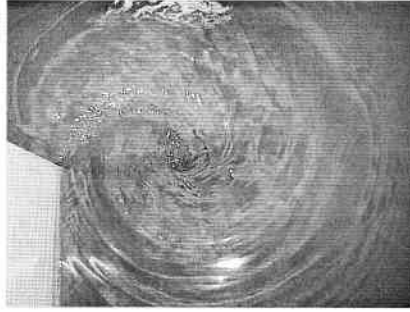

**Figure 2.** Shed vortex formed during passage of solitary wave past a vertical wall. (From Hommel et al., 2000. Reproduced with permission of ASCE).

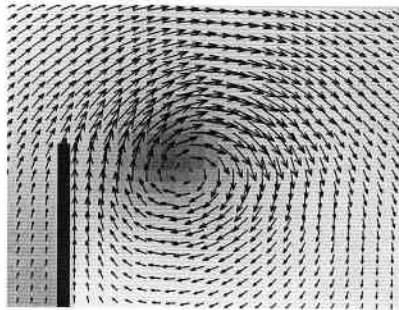

**Figure 3.** Calculated velocity field corresponding to vortex in Figure 2. (From Hommel et al., 2000. Reproduced with permission of ASCE).

depression. The depression is simply the manifestation of a singularity in the solution at the breakwater tip, caused by the approach to infinite acceleration as fluid turns the  $180^\circ$  corner. This result shows conclusively that the truly irrotational models in the form of a Bernoulli equation will not spontaneously generate a vortex due to flow separation or advect the vortex away from the generation region. Hommel et al. (2000) considered the somewhat different case of a breakwater oriented parallel to the crest of the approaching solitary wave. Figure 2 shows a photograph of a vortex core shed during passage of a solitary wave from the left, with the core rotation in the clockwise direction. Figure 3 shows the corresponding numerical result, with velocity vectors overlying a colormap of the vorticity field. In general, agreement between modeled and measured velocity time series were good for these cases. Results are omitted here, and the reader is referred to Hommel et al. (2000).

#### 2.4. Extensions to Higher Order

The  $O(\mu^2)$  model described above has provided a robust framework for predicting wave propagation in shallow to intermediate water depths, but still exhibits limitations in predicting water particle kinematics. In particular, predictions of wave-induced horizontal velocity near the sea bed breaks down for values of  $\mu$  far smaller than implied by the limitations on model dispersion accuracy. For example, the horizontal velocity predicted by the model of Wei et al. (1995) falls to zero at  $\mu = \sqrt{10}$  and becomes negative in sign (relative to the surface velocity) in deeper water, as illustrated in Figure 4. This type of result renders the  $O(\mu^2)$  models useless for prediction of near bed kinematics